



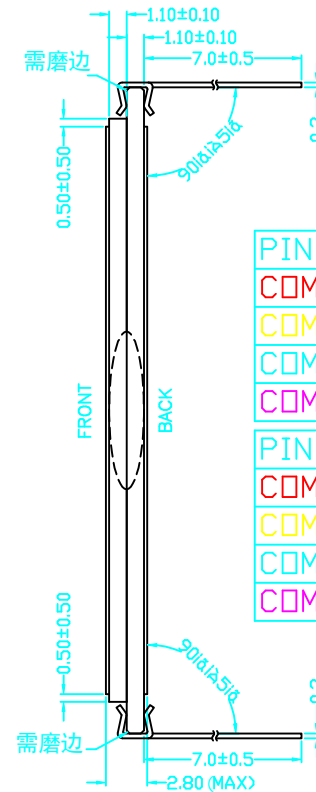


MECHANICAL TOL. ± 0.2 UNLESS SPECIFIED

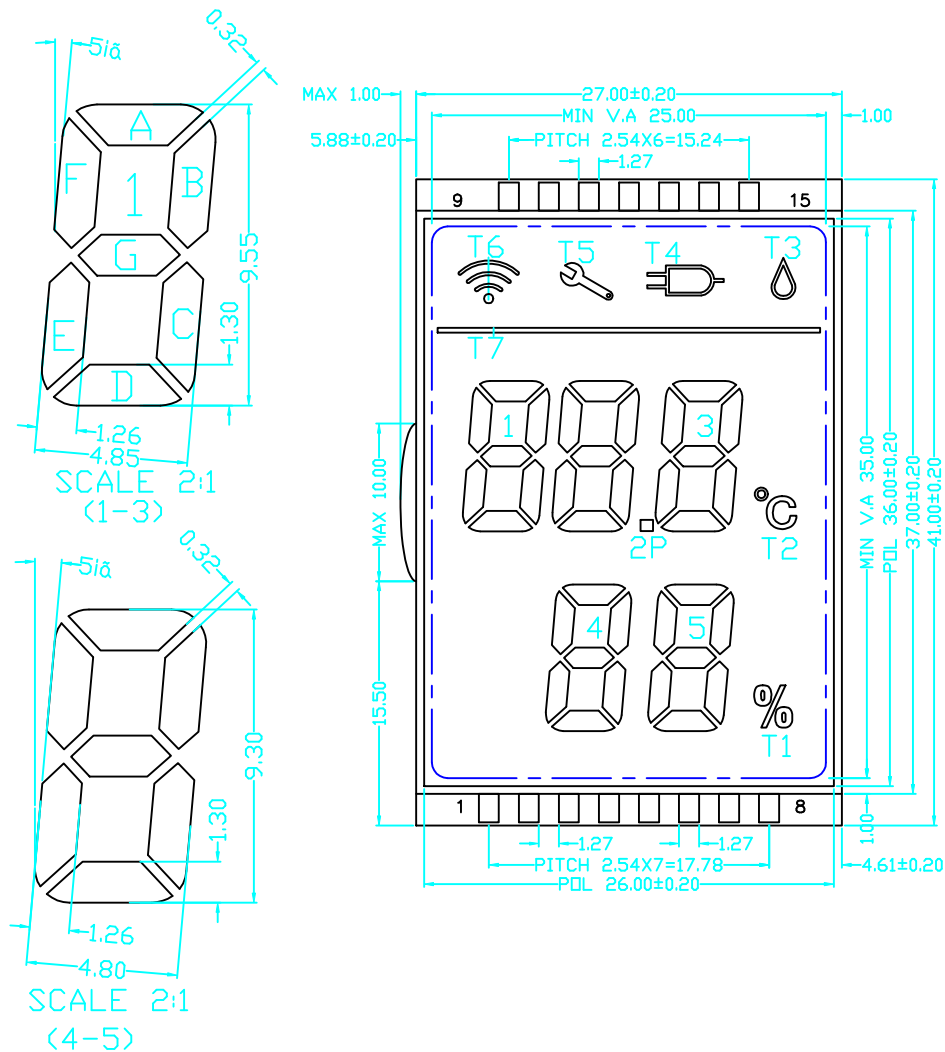


PIN	1	2	3	4	5	6	7	8
COM0				COM0	4D		5D	T1
COM1			COM1		4E	4C	5E	5C
COM2		COM2			4G	4B	5G	5B
COM3	COM3				4F	4A	5F	5A

PIN	9	10	11	12	13	14	15
COM0	1 D	T2	2D	2P	3D	T7	T3
COM1	1 E	1 C	2E	2C	3E	3C	T4
COM2	1 G	1 B	2G	2B	3G	3B	T5
COM3	1 F	1 A	2F	2A	3F	3A	T6

DISPLAY TYPE	HTN/POSITIVE	DRAW No:	YH-H50261ARP	REV: 2	<div> 中山市宇辉电子有限公司 Zhong Shan Yuhui Electronics CO.,LTD.</div>						
VIEWING DIRECTION	6 O'CLOCK	DRAWING BY	liang 2021.3.1	SHEET: 1/3							
DRIVE METHOD	1/4D 1/3B	CHECKED BY	ZB	UNIT: MM	SCALE: NTS	NO	DATE	CHANGE DESCRIPTION			
DRIVE VOLTAGE	3.0V	APPROVED BY	ZB	IC No:		1	2021.2.29	修改玻璃尺寸,出脚方向,逻辑			
POLARIZER MODE	REFLECTIVE	CONNECT METHOD	PIN			2	2021.3.1	电压改为3.0V			
OPERATING TEMP	-10° TO +60°	STORAGE TEMP	-20° TO +70°	CUSTOMER No.		3					

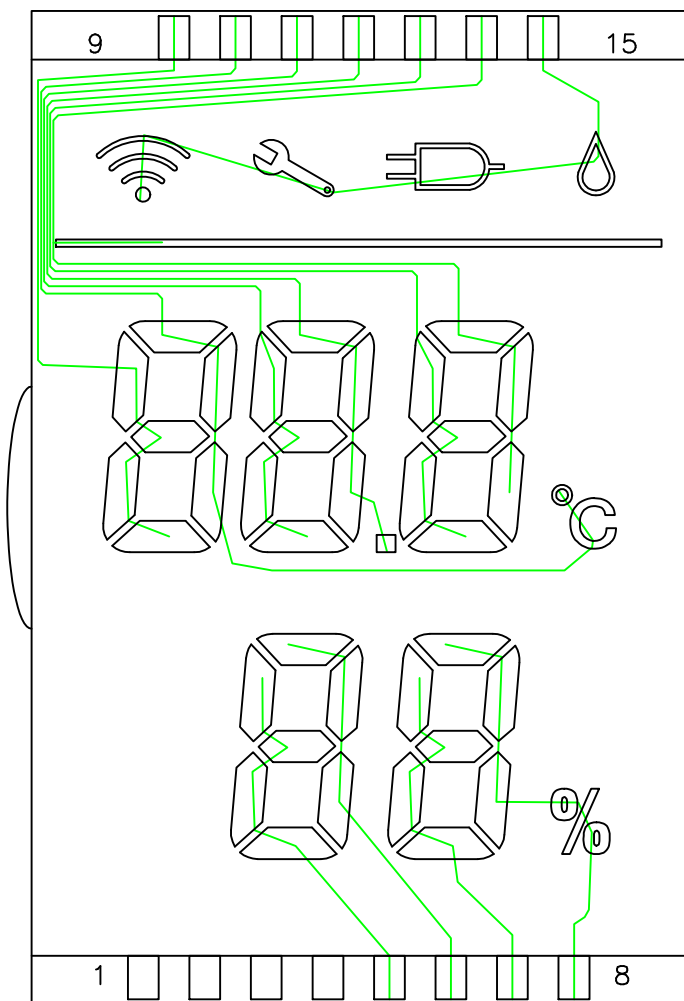

SEG

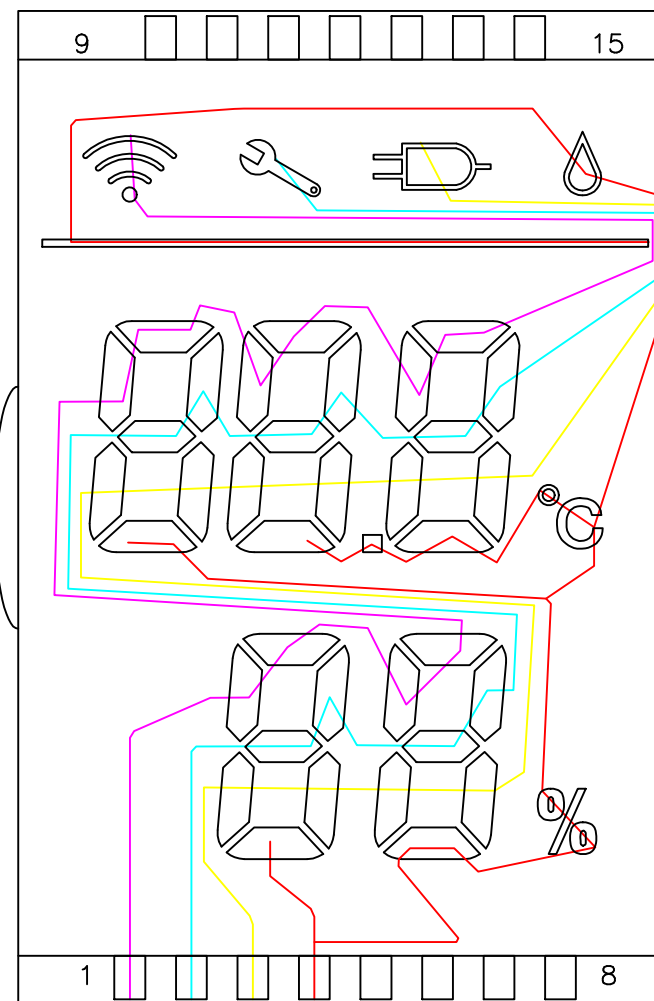


COM

此页面仅供参考逻辑走线




中山市宇辉电子有限公司
Zhong Shan Yuhui Electronics CO.,LTD.

DRAW NO.	YH-H50261ARP	REVISION: 2
DRAW BY	liang	SHEET: 2/3
CHECKED BY	ZB	DATE: 2021.3.1

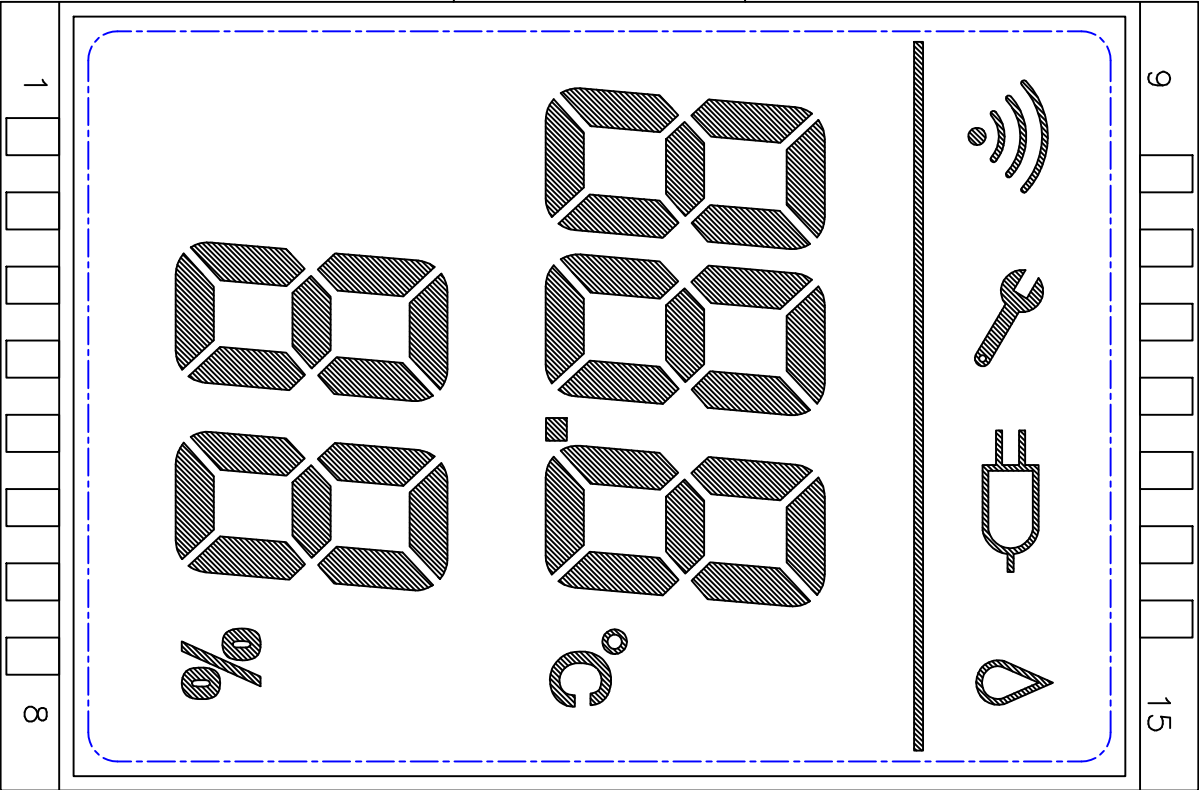

4:1
显示效果图



1:1
显示效果图

DRAW NO.	YH-H50261ARP	REVSION:2
DRAW BY	liang	SHEET: 3/3
CHECKED BY	ZB	DATE: 2021.31